

Appl. No. 10/715,802
Amdt. dated April 28, 2005
Reply to Office Action of March 3, 2005

Amendments to the Claims:


This listing of claims will replace all prior versions, and listings, of claims in the application:

Claim 1 (currently amended). An image-receiving element for use in a photographic or photothermographic diffusion transfer process comprising in sequence:

a support;

an image-receiving layer; and

a strip-coat layer overlying said image-receiving layer, said strip-coat layer comprising an anion of a poly(acrylic acid) represented by the formula




(I)

where n is an integer of from about 65 to about 3500

complexed with a cationic quaternary salt represented by the formula


Appl. No. 10/715,802
 Amdt. dated April 28, 2005
 Reply to Office Action of March 3, 2005

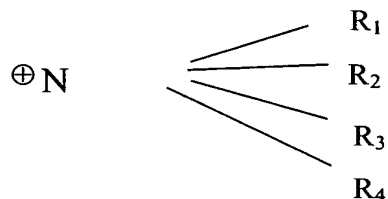

wherein

$\text{R}_1 - \text{R}_4$ are each independently selected from the group consisting of hydrogen, $\text{C}_1 - \text{C}_6$ alkyl and $-(\text{CH}_2)_m$ R_5 , wherein m is 1 or 2 and R_5 is phenyl; and

an ethoxylated polymer represented by the formula



where p is an integer of about 40.

Claim 2 (canceled hereby).

Claim 3 (original). The image-receiving element as defined in Claim 1 wherein said anion of poly(acrylic acid) has a molecular weight of from about 5,000 to about 500,000.

Claim 4. (original). The image-receiving element as defined in Claim 3 wherein said anion of poly(acrylic acid) has a molecular weight of about 50,000.

Claim 5 (original). The image-receiving element as defined in Claim 1 wherein said strip coat comprises

Appl. No. 10/715,802
Amdt. dated April 28, 2005
Reply to Office Action of March 3, 2005

from about 5:1 to about 1:1 parts by weight of said anion of poly(acrylic acid) to said quaternary salt.

Claim 6 (original). The image-receiving element as defined in Claim 1 wherein said quaternary salt is ammonium chloride.

Claim 7 (currently amended) The image-receiving element as defined in Claim 2 1 wherein said strip coat comprises from about 10 to about 40 parts by weight of said ethoxylated polymer and from about 60 to about 90 parts by weight of said anion of poly(acrylic acid) and said quaternary salt

Claim 8 (currently amended). The image-receiving element as defined in Claim 2 1 wherein said strip coat comprises an anion of poly(acrylic acid), ammonium chloride and said ethoxylated polymer.

Claim 9 (original). A diffusion transfer film unit adapted for use in photographic and photothermographic processes, said film unit comprising:

a photosensitive element comprising a support carrying at least one silver halide emulsion layer; and
an image-receiving element as defined in Claim 1 adapted to be separated from said photosensitive element following photoexposure and photographic processing.

Claim 10. (canceled hereby).

Appl. No. 10/715,802
Amdt. dated April 28, 2005
Reply to Office Action of March 3, 2005

Claim 11 (original). The diffusion transfer film unit as defined in Claim 9 wherein said anion of poly(acrylic acid) has a molecular weight of from about 5,000 to about 500,000.

Claim 12 (original). The diffusion transfer film as defined in Claim 11 wherein said anion of poly(acrylic acid) has a molecular weight of about 50,000.

Claim 13 (original). The diffusion transfer film unit as defined in Claim 9 wherein said strip coat comprises from about 5:1 to about 1:1 parts by weight of said anion of poly(acrylic acid) to said quaternary salt.

Claim 14 (original). The diffusion transfer film unit as defined in Claim 9 wherein said quaternary salt is ammonium chloride.

Claim 15 (original). The diffusion transfer film unit as defined in Claim 9 wherein said strip coat comprises from about 10 to about 40 parts by weight of said ethoxylated polymer and from about 60 to about 90 parts by weight of said anion of poly(acrylic acid) and said quaternary salt.

Appl. No. 10/715,802
Amdt. dated April 28, 2005
Reply to Office Action of March 3, 2005

Claim 16 (currently amended). The diffusion transfer film unit as defined in Claim ~~10~~ 9 wherein said strip coat comprises said anion of poly (acrylic acid), ammonium chloride and said ethoxylated polymer.